

Schmierpinsel für die automatische Kettenschmierung

Lubrication brushes for automatic chain lubrication

Robuste, langlebige Schmierpinsel mit extra verschleißbeständigen Nylon-Borsten.

Zudem sind die Borsten dieser Schmierpinsel gewellt ausgeführt um ein besonders gutes Halte- und Puffervermögen für den auszubringenden Schmierstoff zu erreichen.

Handelt es sich um große Ketten die geschmiert werden sollen, oder um Ketten, die mit zusätzlichen Störkonturen wie Mitnehmern oder Stützlaschen versehen sind, sind Schmierpinsel der Ausführung PL zu empfehlen.

Robust, durable lubricating brush with extra wear-resistant nylon bristles. The bristles are wavy in order to give the lubricating brush a particularly good holding and buffering capacity for the lubricant to be applied.

If the chains involved are large or have additional interfering contours such as drivers or support plates that are to be lubricated, we recommend using PL type lubricating brushes.



Technische Daten:

Schmierpinsel mit PA-6 Borsten:

Borsten: Ø0,3 mm gewellt

Gewinde G: 1/8" BSP

Borstenfassung: Messing vernickelt

Max. Einsatztemperatur: 60° C

Technical specifications:



Lubrication brush with PA-6 bristles:

Bristles: Ø0.3 mm corrugated

Thread G: 1/8" BSP

Bristle socket: Nickel-plated brass

Max. Operating temperature: 60° C

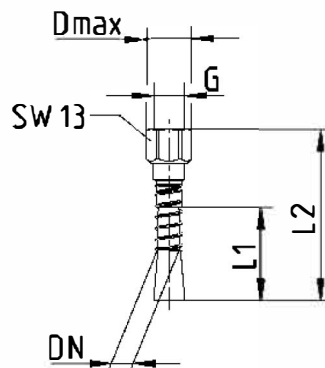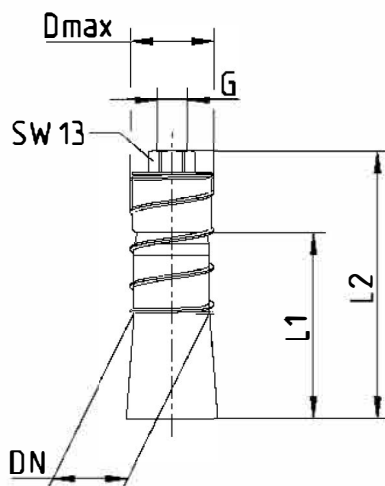

	<i>Pinsel Typ</i>	<i>DN</i>	<i>L1</i>	<i>L2</i>	<i>Dmax</i>	<i>Artikelnummer</i>
	<i>PL 1/4"</i>	<i>Ø6 mm</i>	<i>30 mm</i>	<i>52 mm</i>	<i>Ø15 mm</i>	<i>0120106013050-VOG</i>
	<i>PL 5/8"</i>	<i>Ø16 mm</i>	<i>60 mm</i>	<i>81 mm</i>	<i>Ø20 mm</i>	<i>0120116016050-VOG</i>
	<i>PL 1"</i>	<i>Ø25 mm</i>	<i>60 mm</i>	<i>86 mm</i>	<i>Ø28 mm</i>	<i>0120125016050-VOG</i>
	<i>PL 1 1/4"</i>	<i>Ø32 mm</i>	<i>70 mm</i>	<i>96 mm</i>	<i>Ø35 mm</i>	<i>0120130017050-VOG</i>

	<i>Pinsel Typ</i>	<i>DN</i>	<i>L1</i>	<i>L2</i>	<i>Dmax</i>	<i>Artikelnummer</i>
	PK 5/8"	Ø16 mm	30 mm	51 mm	Ø18 mm	0120116013050-VOG
	PK 1/4"	Ø25 mm	45 mm	71 mm	Ø25 mm	0120125014550-VOG
	PK 1 1/4"	Ø32 mm	45 mm	71 mm	Ø32 mm	0120132014550-VOG